



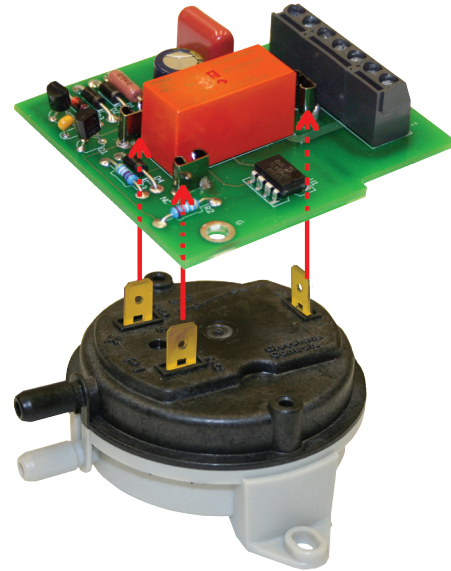

Programmable Timer Module Option

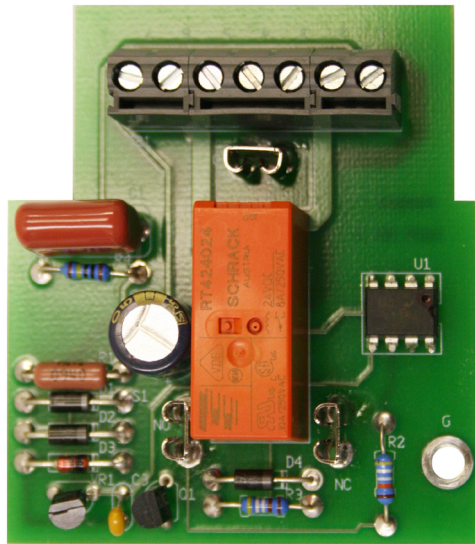

MICROPROCESSOR-BASED PROGRAMMABLE TIMER MODULE OPTION

Cleveland Controls NS2 Air Pressure Sensing Switches can be equipped with a versatile electronic time delay assembly. This feature delays either the “on” or the “off” or the simultaneous “on” and “off” signal from the sensing switch. The microprocessor-based timer module can be factory-programmed to any combination of delay times based upon specified application requirements. The electronic time delay option must be installed on the snap switch at the factory. It consists of a microprocessor-based timer-relay pack circuit board assembly containing a power connection terminal block, a DPDT slave relay with two form-C contacts connected to a terminal block with clamp-type screw connectors suitable for 12-26 AWG wire. One contact is rated 8 Amps. The other contact is rated 1 Amp @ 120 VAC. Both ratings are resistive.

APPLICATION

The programmable timer option is ideally suited for applications requiring a delay of the “on”, or the “off”, or the simultaneous “on” and “off” signal from an **NS2 Air Pressure Sensing Switch**. Dual contact field wiring terminals permit the connection of one or two control or alarm devices. The option is available for 120 VAC or 24 VAC applications. Most standard SPDT models can be equipped with this option. Consult the factory for custom application information.

OPERATION

Refer to the schematic drawing on page 2. Before pressure is applied to the diaphragm, the snap switch contacts are in the normally closed (NC) position, as shown.

As differential pressure exceeds the set point, the snap switch NO contacts close, signaling the microprocessor that the air switch has changed states. In a typical application, the microprocessor will energize the relay and begin timing when it senses that the NO contacts on the air switch have closed.



Cleveland Controls
DIVISION OF UNICONTROL INC.
1111 Brookpark Rd
Cleveland OH 44109

Tel: 216-398-0330

Fax: 216-398-8558

Email: saleshvac@unicontrolinc.com

Web page: <http://www.clevelandcontrols.com>

Are you reading a FAX or a COPY of this bulletin? **DOWNLOAD** the full-color PDF version of this and other literature at our website!

SPECIFICATIONS

Electrical Rating:

120 V AC, 50/60 Hz.
or 24 V AC.

Contacts:

DPDT, (2) Form C

Rating:

A—8A@ 250 V AC Resistive
1/8 hp @ 250 V AC

B—1A@ 120 V AC Resistive

Time Delay Cycle:

Factory programmable,
ON, **OFF** or both.

